

VZ-C3D Visualizer System



Bringing Reality Closer in 3D

VZ-C3D Ceiling Visualizer System



WolfVision's VZ-C3D is the world's first 3D Visualizer system, a stereoscopic 3D 'live' presentation solution. The ceiling mounted VZ-C3D features two high precision lenses and an onboard stereoscopic mixer which enables stunning 'live' high definition 3D images to be viewed in realtime via a suitable projector or 3D-enabled display screen.



solutions

Our extensive knowledge and expertise across all application sectors enables us to offer comprehensive consultative guidance on customized combinations of Visualizer and camera hardware, software, and accessories, which enhance communication, collaboration, and knowledgesharing across all environments. Aspart of each individual √Solution we offer not only pre-sales advice, but also post-sales support, training and service, ensuring that you receive maximum benefit from your investment.












3D Imaging Excellence

WolfVision Visualizers are well-known for their unrivalled imaging quality, which is due to the perfect combination of high quality components and remarkable expertise. Our systems deliver high resolution throughout the entire picture, true-to-life colors, and consistently high frame rates to ensure smoothness of motion. They have fast and accurate autofocus and zooming, giving high quality dependable results every time! High end lenses provide distortion-free images, and high tech lighting systems deliver smooth and consistent lighting without distracting reflections or hot spots.

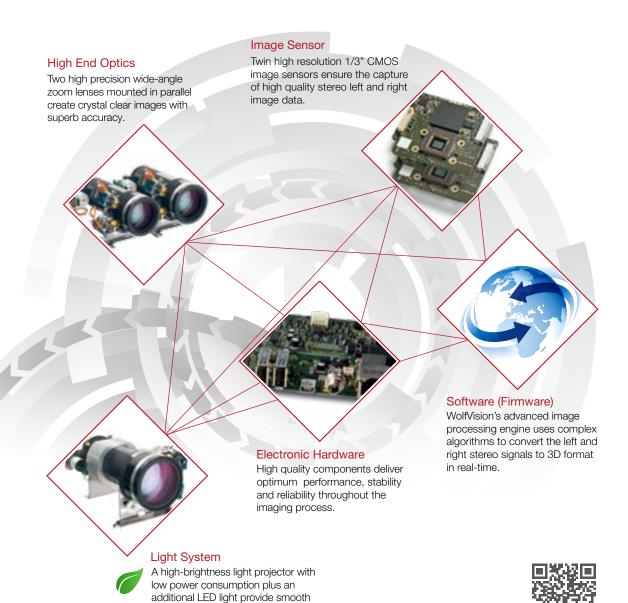

and consistent lighting necessary for accurate color reproduction.



Switchable 3D / 2D Modes

The VZ-C3D is switchable between 3D and 2D modes providing maximum flexibility in the range of materials that can be displayed.

Large Zoom Range for Flexible Imaging

A large optical zoom range is one of the most important features of a Visualizer, because only an optical zoom can pick up objects in full resolution. The VZ-C3D features two high precision wide-angle camera lenses with 15x optical / 4x digital zoom factor.

Control the 3D Effect

Presenters can control the extent of the 3D effect using the adjustable depth control (vergence) feature - selecting exactly how far the 3D image appears to be 'in front' of or 'behind' the surface of the display screen.

Powerful High Definition Cameras


The VZ-C3D system is equipped with two state-of-the-art CMOS cameras with native 1080p HD resolution and 30 frames per second in both 3D and 2D modes. 980 lines resolution are visible in every part of the picture including the edges.

High Depth of Focus

The VZ-C3D Visualizer provides a very high depth of focus. This is of great benefit when working with large 3-dimensional objects.

Intuitive Positioning -Synchronized Lightfield

A lightfield the same size as the pickup area of the camera shines onto the working surface. The light and the camera are synchronized so that when zooming in and out, the size of this lightfield changes accordingly, so a user always knows exactly where to place objects or documents.

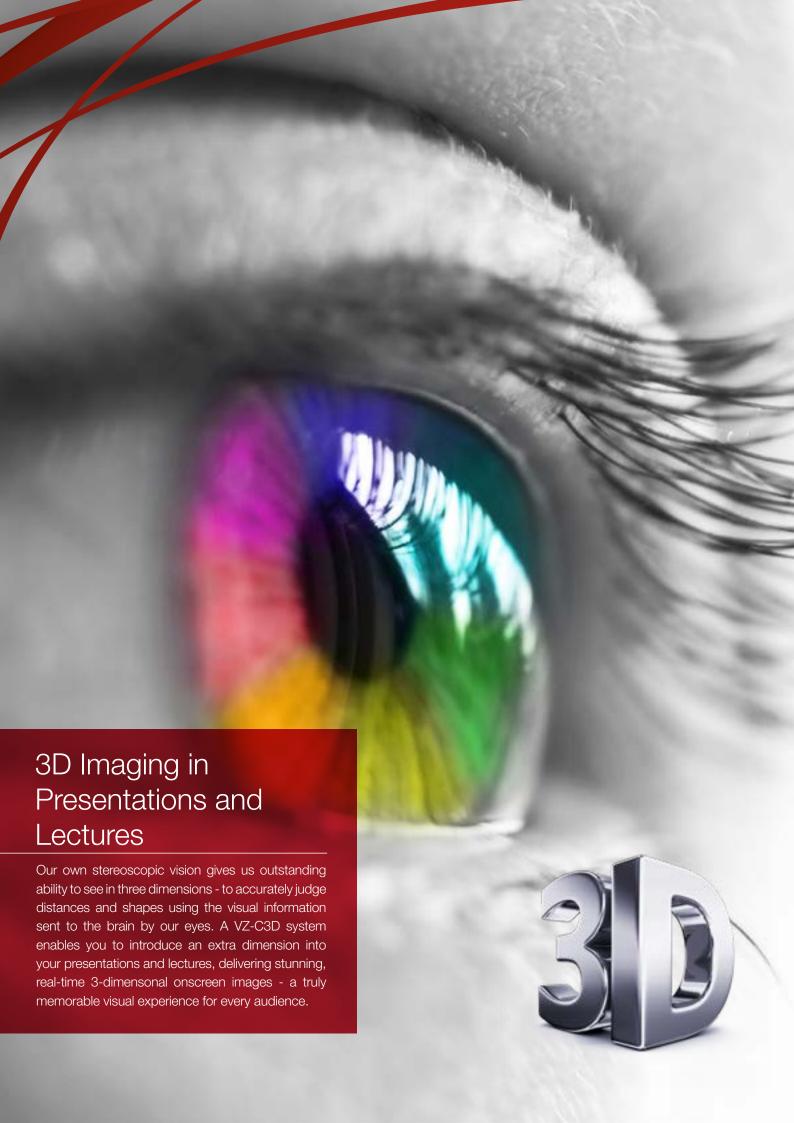

Adding a New Dimension

Display Screen Compatibility

The VZ-C3D system is compatible with all current 3D projectors and displays, and provides outstanding picture quality when using either glasses or glassesfree models. All HDMI 3D standard formats are supported to ensure compatibility:

- Frame packing
- Top and bottom
- Side by side
- Page flip
- Line alternative
- Left/right
- Right/left



√Solution App for Smartphones

The vSolution App enables iPhone, iPad, Windows or Android devices to connect to a VZ-C3D Visualizer system via WLAN. This intuitive and easy-to-use app allows presenters to use the de-

vice keypad and Live Image Preview to control presentations or lectures wirelessly from anywhere in the room.

√Solution Link Pro

vSolution Link Pro software enables management of all WolfVision Visualizer systems across multiple locations. It offers the possibility to setup local administrators, and assign devices,

as well as updating firmware for either single or multiple devices.



Camera	2 x CMOS 1/3"
2-dimensional / 3-dimensional	2D and 3D
Pictures per second (as picked up by the camera)	30 frames per second in 2D and 3D mode
Native (effective Pixels of camera sensor)	2 x 1920x1080 (=2 x 2,073,600)
Native pixels of image processing	2 x 1920x1080 (=2 x 2,073,600)
Pixels processed per second (=effective pixels x frames per second)	124,416,000
Colour reproduction / precision	Very good colors (sRGB color precision)
Native signal output	1080p HD (1920x1080) in 2D/3D mode, with 3D modes: frame packing, top and bottom, side by side, page flip, line alternative, left/right and right/left
Resolution (measured)	980 lines
Brightness control	Automatic and manual
White balance adjustment	Automatic and manual
Autofocus / Speed	Yes, (continuously working, high speed)
Synchronized lightfield (for easy positioning of objects)	Yes
On screen menu with Help	Yes
Firmware Updates via	LAN, vSolution Link Pro software
Zoom / Lens	2 camera wide-angle zoom lenses and 1 light zoom lens. 60x zoom (15x optical + 4x digital)
Max. object height on working surface	Depending on installation height (maximum limit 1.7m / 66.9")
Max. width of pick-up area on working surface	Depending on installation height (861mm - 1886mm / 33.8" - 74.2")
Min. width of pick-up area on working surface	Depending on installation height (78mm - 174mm / 3.1"- 6.9")
Depth of focus on small object (42x33mm /1.6"x1.3")	Larger than 20mm (0.8")
Depth of focus on large object (360x270mm/14.2"x10.6")	Larger than 250mm (9.7")
Shadow free illumination	Yes
Illumination of hollow objects	Yes
Reflection free area on working surface	Entire working surface
Light source	Maintenance free high-brightness LED light system (high light output, low power consumption), lamp lifetime: 30,000 hours
vSolution Link Pro	Yes, for remote management & firmware updates (for Windows 10, Windows Server 2012 R2 & 2016, Windows Web Server, macOS)
Video recording including audio	Yes, to 500GB SSD storage
Video recording including audio User programmable presets	Yes, to 500GB SSD storage
User programmable presets	3
User programmable presets HDMI output	3 Yes, 2x
User programmable presets HDMI output Ethernet/LAN port	3 Yes, 2x Yes
User programmable presets HDMI output Ethernet/LAN port LAN web interface LAN streaming modes (multicast and unicast) vSolution App compatible	3 Yes, 2x Yes Yes
User programmable presets HDMI output Ethernet/LAN port LAN web interface LAN streaming modes (multicast and unicast)	3 Yes, 2x Yes Yes Yes Yes (Motion JPEG)
User programmable presets HDMI output Ethernet/LAN port LAN web interface LAN streaming modes (multicast and unicast) vSolution App compatible	3 Yes, 2x Yes Yes Yes Yes Yes (Motion JPEG) Yes, wireless control via a mobile device (app available for iOS, iPadOS, Android, and Windows)
User programmable presets HDMI output Ethernet/LAN port LAN web interface LAN streaming modes (multicast and unicast) vSolution App compatible Advanced controlling with professional protocol via LAN Weight Infrared remote control	3 Yes, 2x Yes Yes Yes Yes Yes, wireless control via a mobile device (app available for iOS, iPadOS, Android, and Windows) Yes
User programmable presets HDMI output Ethernet/LAN port LAN web interface LAN streaming modes (multicast and unicast) vSolution App compatible Advanced controlling with professional protocol via LAN Weight	3 Yes, 2x Yes Yes Yes Yes Yes (Motion JPEG) Yes, wireless control via a mobile device (app available for iOS, iPadOS, Android, and Windows) Yes 5.2kg (11.5lbs)
User programmable presets HDMI output Ethernet/LAN port LAN web interface LAN streaming modes (multicast and unicast) vSolution App compatible Advanced controlling with professional protocol via LAN Weight Infrared remote control	Yes, 2x Yes Yes Yes Yes Yes Yes, (Motion JPEG) Yes, wireless control via a mobile device (app available for iOS, iPadOS, Android, and Windows) Yes 5.2kg (11.5lbs) Yes. Optional: external receiver (with 10m cable and status LED)

Your WolfVision Partner:





Design and specifications subject to change!

Head Office:

UK Sales Office

WolfVision UK Ltd.

Tel. +44 1628 968660

wolfvision.uk@wolfvision.com

Warranty / Made in

WolfVision GmbH 6833 Klaus / Austria Tel. +43 5523 52250 wolfvision@wolfvision.com Japan Sales Office WolfVision Co. Ltd. Tel. +81 3 6233 9465 wolfvision.japan@wolfvision.com

Middle East Sales Office WolfVision Middle East (Dubai) Tel. +971 5617 40008 wolfvision.mideast@wolfvision.com USA Sales Office WolfVision, Inc. Tel. +1 770 931 6802 sales@wolfvision.us

Asia Sales Office WolfVision Pte. Ltd. (Singapore) Tel. +65 6636 1268 wolfvision.asia@wolfvision.net

Nordic Sales Office WolfVision Nordic (Norway) Tel. +47 9186 9736 wolfvision.nordic@wolfvision.net

Germany Sales Office WolfVision GmbH Tel. 0800 9828 787 wolfvision.deutschland@wolfvision.com



